




TRANE

India's first Interactive Concealed AC. Experience the incredible.

Be smart, be lazy.™

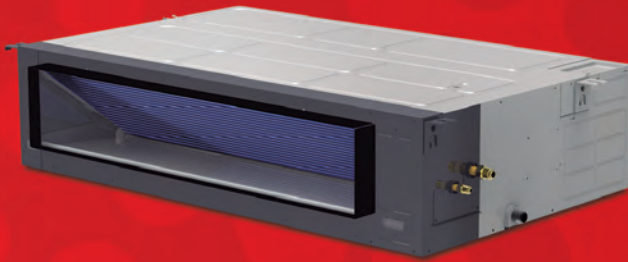

Interactive Concealed AC CN1 Series (1.5/2/3 & 4 T)




Interactive Remote

Trane Interactive Features




Multi-Room Control

Avoid moving between rooms to control your ACs. The multi-room mode can control up to 18 Trane ACs & one Lock. You can switch on/off, change temperature or fan speed of any Trane AC anywhere in your house

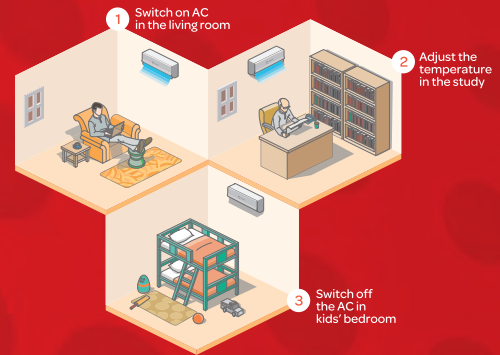


Efficiency Meter

Forget your worries about energy being wasted. The Efficiency Meter on the remote enables you to keep real time control of your AC's energy consumption by helping you choose the right set point based on the weather outside

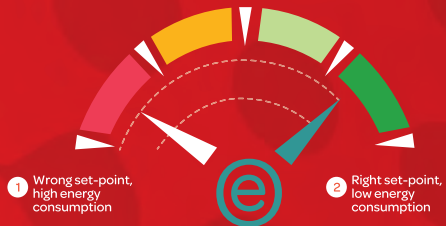


Trane Weather Sync mode

Stop changing the room temperature according to the weather outside. Trane Weather-Sync mode automatically syncs the operations of the AC with the weather outside to give you the optimum temperature inside

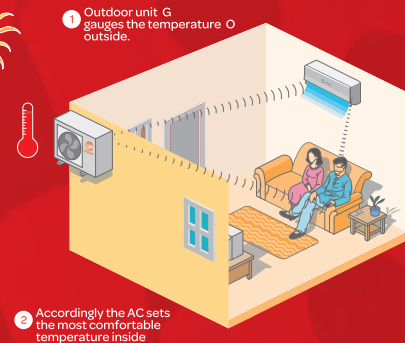



No Pointing
Control your AC without pointing at it

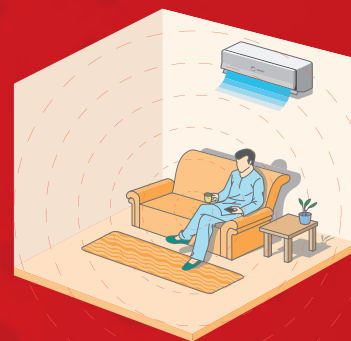


Service Alerts
Easy alerts for effortless understanding.

- FILTER CHOKE - CLEAN THE FILTER
- INPUT POWER FAILURE
- LOW BATTERY- CHANGE THE BATTERY

Easily comprehensible Service Alerts



Turbo mode
Better air-throw and faster cooling

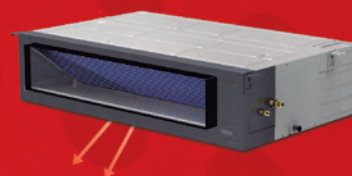

Specification of Series: CN1 (Interactive Concealed AC)

Specification	Description	Model	TCT48CC	TCS36CC	TCR24CC	TCR18CC
Capacity	Cooling	Watts	14,068	10,551	7,034	5,275
	Cooling	BTU/Hr	48,000	36,000	24,000	18,000
	Compressor/Refrigerant	Type	Twin Rotary/R22	Scroll/ R22	Rotary/ R22	Rotary/ R22
Elec. Rating	Power Supply	Volt/Phase/Hz.	380V/ 50Hz/ 3Ph	220-240V~ 50Hz, 1Ph	220-240V~ 50Hz, 1Ph	220-240V~ 50Hz, 1Ph
	Power Input	Watts	5110	3810	2490	1870
	Running Current	Amps	9.2	16.9	11.0	8.2
Performancey	EER/COP	W / W	2.75	2.77	2.82	2.82
	Indoor air flow (Turbo/Hi/Mi/Lo)	CMH	3010/2940/2410/1940	2270/2200/1890/1650	1400/1320/1100/1000	1170/1100/770/650
	Indoor Noise	dB	36	36	33	33
Features	Speed Setting		4 Level	4 Level	4 Level	4 Level
	Display Type		LED	LED	LED	LED
	Memory Backup		Yes	Yes	Yes	Yes
	Sleep mode		Yes	Yes	Yes	Yes
	Dry Mode		Yes	Yes	Yes	Yes
	Weather Sync Mode		Yes	Yes	Yes	Yes
	Turbo Mode		Yes	Yes	Yes	Yes
Connectivity		Door Lock	Door Lock	Door Lock	Door Lock	
Filters	Bacteria Filter		Yes	Yes	Yes	Yes
Weight & Dimensions	IDU Size (Net)	(WxHxD) mm	1200x300x865	1140x270x775	920x270x635	920x210x635
	ODU Size (Net)	(WxHxD) mm	990x965x345	895x862x313	842x695x324	760x590x285
	IDU Weight (Net/Gross)	Kg	47/55	41/46	28/34	24/30
	ODU Weight (Net/Gross)	Kg	76/86	79/83	48/52	35/38
Indoor external static pressure (Hi)		Pa	100	80	70	70

*Specifications are subject to continuous upgrade and can change any time.
**Works upto 52° C under varying power supply conditions.



Live assistance at
www.traneindia.com

